

COALESCING FILTER



Coalescing Filter from Natural Gas

- 4 different closure styles. Available in 180, 285, 740 and 1480 psi.
- Standard line sizes - from 2" to 12". Custom sizes to 24" available.
- A wide range of flowrates. - 18,000 to 17,000,000 scfh.


Size	Dimensions			
	A	B	C	F
2"	40"	12"	18"	17"
3"	50"	15"	21"	18"
4"	60"	18"	29"	20"
6"	61"	20"	28"	24"
8"	65"	18"	33"	28"
10"	86"	24"	46"	32"
12"	96"	24"	48"	40"

STANDARD HOUSING DESIGN

- Welded Steel Construction
- ASME Code, Section VIII Construction (stamped and certified optional)
- Interior Epoxy Coated
- Exterior Prime Coated
- Swing Bolt Head Closure
- Hinged End Opening Cover
- Buna-N O-Ring Closure Seal

Materials of Construction:

Shell/Body , Flanges, Nozzles - Carbon Steel ASTM A516Gr70 or Stainless Steel ASTM A240 316L.

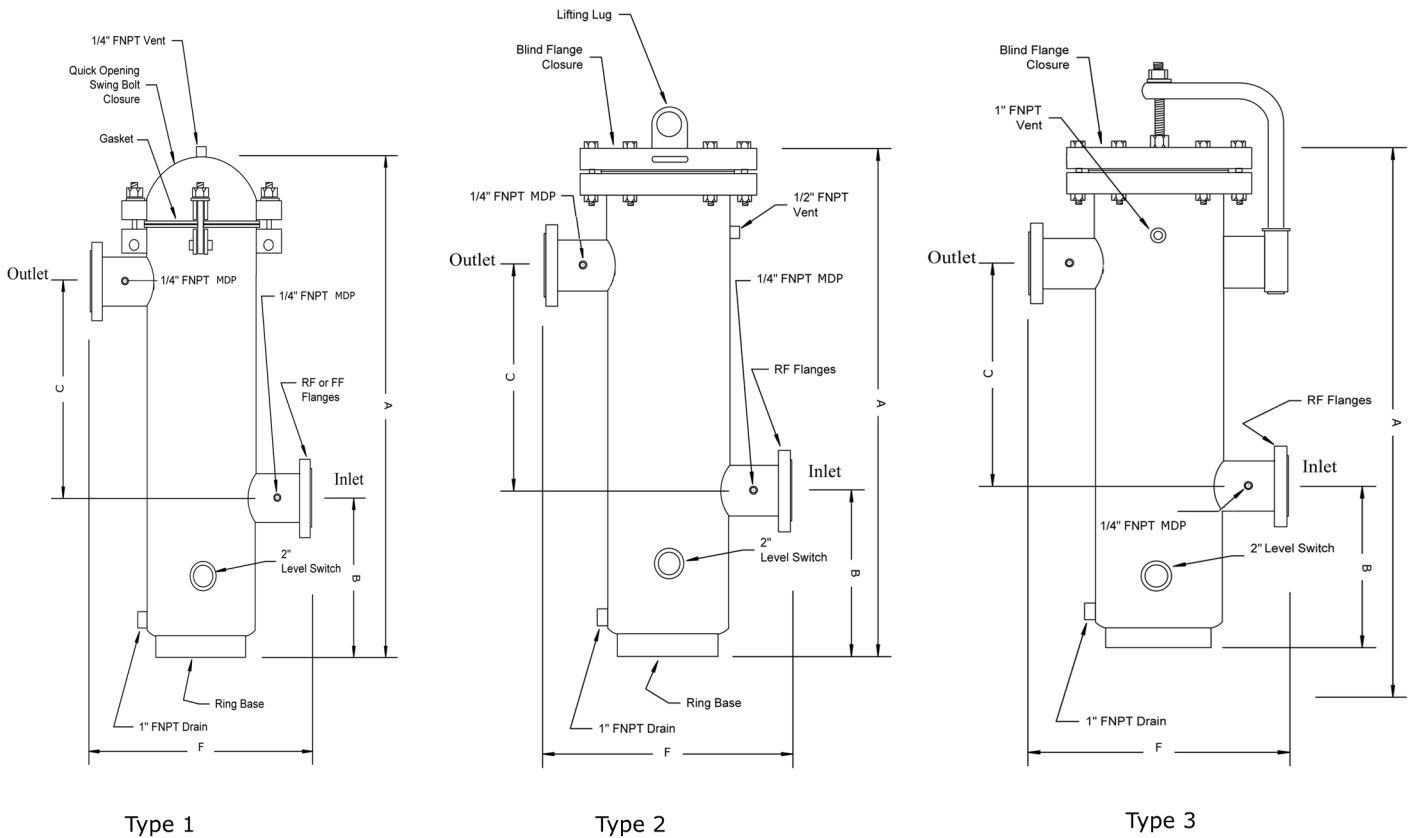

*** The drawing all dimensions on a pressure of 180 psi. On the other pressures - specify.

NOTES: SPECIFICATION AND SIZES CAN CHANGE WITHOUT PRIOR NOTICE; FOR REFERENCE ONLY; NOT TO BE USED FOR PRE-PIPING WORK; NOT TO SCALE
ACCURATE DIMENSIONS AND DETAILS WILL BE ISSUED WITH ENGINEERING DRAWING

